




TEAMBEST GLOBAL®



MOSFET Dosimetry Systems, RT Area Monitors, Electrometers, QA Instruments...and much more!

All CNMC manufactured products now come with a full 2-year limited warranty!

www.teambest.com

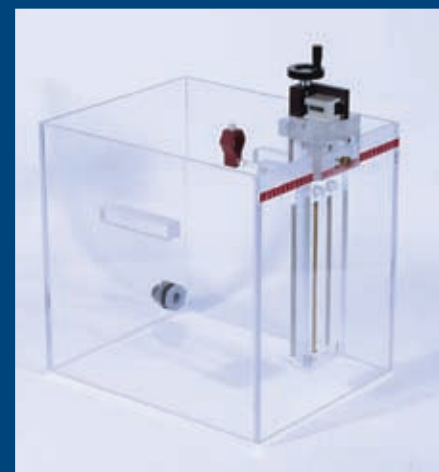

USA orders: CNMC Company tel: 615 391 3076 800 635 2662 sales@cnmcco.com
CAN orders: Best Medical Canada tel: 613 591 2100 877 668 6636 bmcinfo@teambest.com
www.cnmcco.com www.bestmedicalcanada.com www.teambest.com

AFRICA | ASIA | EUROPE | LATIN AMERICA | MIDDLE EAST | NORTH AMERICA

Dose Monitors — MOSFET Patient Dose Verification Systems

All CNMC manufactured products now come with a full 2-year limited warranty!

mobileMOSFET Wireless

- Dose obtained in real-time
- Simplifies dosimetry & minimizes QA time
- Wireless with Bluetooth® technology
- Export dosimetry data to R&V system



Portable Dosimeter

- Stand-alone dosimetry system
- Portable & compact with LCD display
- Optional data export via USB
- No software or computer necessary

MOSFET Dosimeter Features

- Isotropic ($\pm 2\%$ for 360°)
- Active area of 0.2×0.2 mm
- Pinpoint measurement for high gradient fields
- Same calibration factor for photons & electrons at MeV energies



Physics Accessories — Triaxial / Coaxial Extension Cables & Reels

All CNMC manufactured products now come with a full 2-year limited warranty!

Extension Cables

CNMC supplies triaxial and coaxial extension cable assemblies in standard 10-meter or custom lengths, terminated with connectors to fit almost any commercially available electrometer/dosimeter and ion chamber.



Robust Triaxial Ion Chamber Extension Cable

- Ideal for rigorous daily use
- Thicker insulation — reduces internal signal loss & effects of extraneous environmental signals
- Very low noise
- Custom lengths
- Choice of connectors

Cable Reels

CNMC cable reel assemblies offer a great convenience in winding and storage of extension cables. A cable reel will extend the life of a cable significantly by eliminating kinks and providing protection during storage. Only as much cable as needed can be reeled out at any time.



Physics Accessories — Barometers & Thermometers

All CNMC manufactured products now come with a full 2-year limited warranty!

Precision Digital Barometer/Thermometer Models DBT-100 and DBT-100T

The Model DBT-100 is a portable digital barometer and thermometer combination the size of a handheld calculator. Featuring a digital display and high measurement accuracy, the DBT-100 is an ideal portable barometer and thermometer combination. Atmospheric pressure can be displayed in mmHg or mbar and ambient temperature in °C with 0.1 degree resolution. The DBT-100 operates on two 9-Volt alkaline batteries for 100 hours and has a waterproof temperature probe 2 meters in length.

A Model DBT-100T, a DBT-100 enclosed in a sturdy metal enclosure for bench-top use, is also available.



- Range of -100° to 199.99° C (-148° to 199.99° F)*
- Accuracy within $\pm 0.1^{\circ}$ C
- 1 second display update
- 3 meter cable length on probe
- Battery life of >1000 hrs. continuous operation with two AAA batteries
- Weighs 142 g (5 oz.)

* Fahrenheit measurement limited by display

DT-6410 Platinum High Accuracy Thermometer

The DT-6410 Thermometer displays °F/°C minimum/maximum temperatures for previous 24 hours (for each hour) and previous 7 days (for each day); or previous 30 days (for each day). Time/date key shows the exact time and date for all minimum and maximum readings. Alarm is settable in 0.1° increments and signals when temperature rises above/falls below set points. Visual LEDs and audible alarm signal continuously even if temperature returns to non-alarm range. A 4-wire platinum sensor insures linear response and high accuracy across the entire range. The DT-6410 permits easy one-key calibration by user.

Radiation Physics — Electrometers

All CNMC manufactured products now come with a full 2-year limited warranty!

Model 206 Dosimetry Electrometer

The CNMC Model 206 Electrometer maintains the simplicity and ease of use of classic electrometers. Designed using state-of-the-art electronics, the Model 206 easily performs a wide variety of measurements with an accuracy and precision that equals or exceeds that of many higher priced dosimetry electrometers.

- External feedback module
- 1,000-hour operation on “D” cell batteries
- Bias select switch ± 300 V, ± 150 V, external, off
- Less than 5 fA leakage current
- 4-1/2 digit custom LCD
- Instant on – no stabilization period




Accelerator QA — Beam Alignment Checkers

Model AR-QC 002 Isocentric Beam Checker

The Isocentric Beam Checker is a quality assurance tool for assessing in a precise and quick way all the mechanical and geometrical parameters of linear accelerators or Telecobalt units.

- Adequation of radiation field/light field
- Collimator radiation field-size accuracy
- Treatment machine collimator isocentricity
- Treatment table isocentricity
- Gantry isocentricity
- Laser alignments
- Optical Distance Indicators (ODI) accuracy

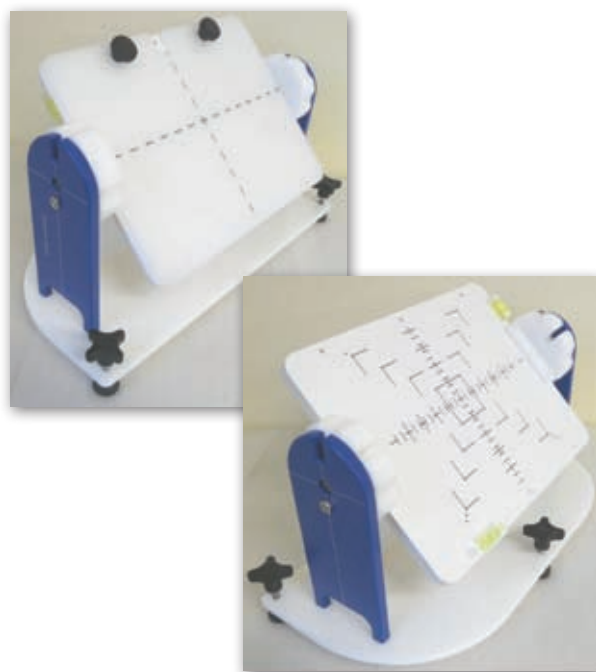


Dosimetry Phantoms — Water Phantoms

All CNMC manufactured products now come with a full 2-year limited warranty!

WP-3040 and WP-3840 Water Phantoms

The CNMC WP-3040 and WP-3840 are calibration grade water phantoms with a convenient-to-use manual ion chamber depth positioning system. The water tanks are constructed of 3/8 inch acrylic, have side-mounted handles for easy transport and a drain with a ball valve.


- Precision tank construction
- Compatible with TG-51 protocol
- Depth precision is 0.1 mm
- Optional remote motor drive
- 4-1/2 digit custom LCD
- Side-mounted handles for easy transport

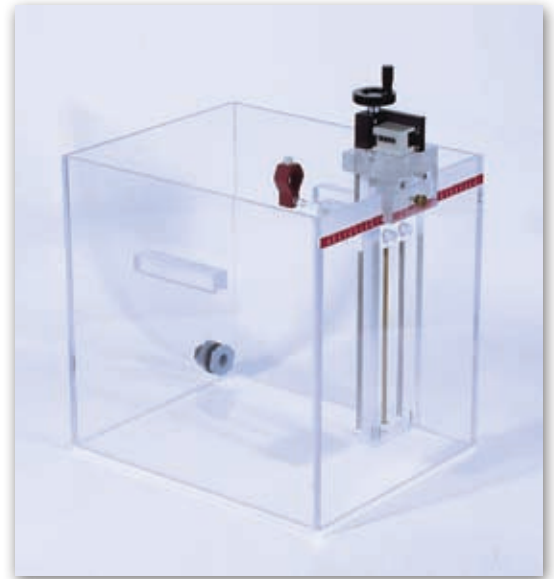

Brachytherapy — Localization

GP-3000 Gamma Probe for Breast Localization

- Easy to use Gamma Probe for detecting Iodine-125, Palladium-103 and Technetium-99m in targeted tissues
- Useful for sentinel node detection and radioactive seed localization
- The Best Gamma Probe delivers outstanding directionality by utilizing a custom shielding probe tip and high sensitivity, ensuring precise accurate localization of targeted area during gamma breast localization detection procedures.

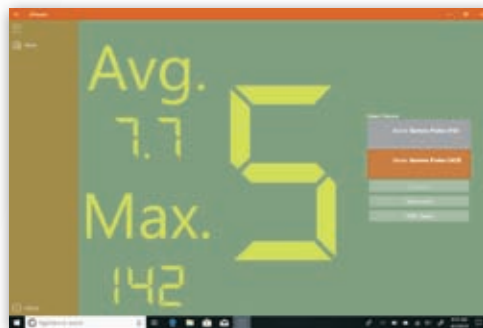

- With the included Microsoft® Surface tablet and the Gamma Probe App, the GP 3000 can be used as a remote detector. The large display can be seen from across the room.

Radiation Protection — Area Monitors, Personal Dosimeters & Dosimetry Services

All CNMC manufactured products now come with a full 2-year limited warranty!

Model 7008 RT Radiation Therapy Area Monitor

The Model 7008 RT is a wall-mounted radiation monitor designed to meet the specific needs of radiation therapy. The monitor features a digital display of radiation rate, audible and visual alarms, alarm indicator, alarm setpoint adjustability over the entire range, and self-diagnostic functions.

- Built-in rechargeable back-up battery
- Radiation rate indicated on an 8-digit LCD display
- Alarm level may be preset in 0.1 mR/h increments
- Visual and audible alarm indication



BDS 8840 Whole Body Dosimeter

- A whole body dosimeter for occupationally exposed radiation workers based on well-established TLD technology
- Accurately determines deep, shallow and lens of the eye radiation dose over a broad range of photon energies

CNMC is the home of Best Dosimetry Services — personal dosimetry monitoring for all radiation environments:

- Hospitals/Clinics
- Dental/Chiropractic/Veterinary Offices
- Medical Manufacturing/Industrial/Government/Reactor Facilities

BDS Extremity Ring Dosimeter

- An extremity ring dosimeter for occupationally exposed radiation workers based on well-established TLD technology
- Accurately determines shallow radiation dose over a broad range of photon and beta energies





Huestis Fixed Lasers — Red or Green Diode

- Unique three-filter design reduces transient power issues and extends diode life
- Precise line quality to ensure accurate position reproducibility
- Easy access to mounting bolt during installation
- Stable aluminum housing



	Red Diode Laser	Green Diode Laser
Depth	3.9" (9.9 cm)	
Width	3" (7.6 cm) housing; 5.5" (13.9 cm) mounting plate	
Height	11.5" (29.2 cm) housing; 13" (33 cm) mounting plate	
Laser Beam Output	Less than 1 mW per beam (Class II laser)	
Line Width	0.9–1.2 mm at isocenter when mounted 3 m from isocenter	0.9–1.1 mm at isocenter when mounted 3 m from isocenter
Fan Beam Angle	Greater than 50 degrees	
Wavelength	635–650 nm	520 nm

Huestis CVO-2000 Warming Oven for Thermoplastics

- Easy-sliding drawer opens fully to provide maximum access to the material
- Multiple masks can be softened at the same time
- Can be used to mold head cushions without getting them wet
- No water — reduces the potential for cross-contamination
- Can be used in CT rooms — no humidity that could otherwise affect the electronics of the imaging system
- Digital temperature setting in Celsius or Fahrenheit
- Insulated case
- Manufactured and assembled in the U.S.A.



Digital dry heat temperature control